

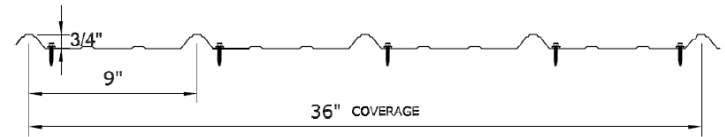


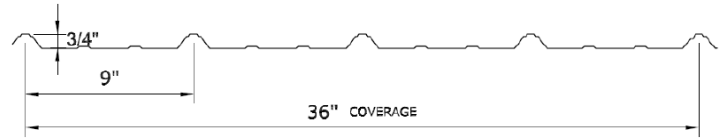

Since 1992

# ROLLED-RIB

## Roof & Wall Panel

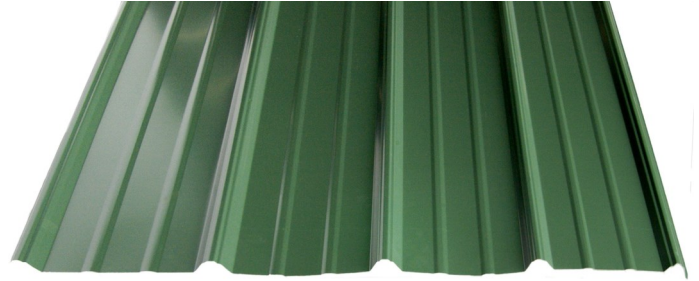

- Exposed fastener roof & wall panel
- All purpose panel for agricultural, residential, and commercial applications.

- 3' coverage for fast installation
- Reinforced major ribs
- Purlin bearing leg
- Anti-siphon lap
- Made from high-tensile steel for superior load capacity
- Painted materials have corrosion resistant metallic finish under the primer & topcoat
- *Tough Bond 3000™* SMP paint system with a 40 year written paint warranty

- Coverage: 36 inches
- Major Rib Height: 3/4"
- Major Rib Spacing: 9" o.c.
- Major Rib Configuration: Trapezoidal with reinforced rib
- Fastening: Exposed, direct fastened
- Thickness: 29GA
- Minimum Roof Slope: 2:12
- Base Metal: 80 ksi steel

**29 GA Rolled-Rib Allowable Gravity Loads (psf)**

Span	2'	2.5'	3'	3.5'	4'	4.5'	5'
Simple Span	104	59	34	21	14	10	7
Two-Span	87	56	39	28	22	17	14
Multi-Span	101	65	45	33	25	20	14

1010 North Nelson St., Spokane, WA 99202 Phone: (509) 535-8667 Toll Free: (800) 238-4057  
 WWW.GO-RSP.com or WWW.RSPSS.COM

GENERAL  
 FEATURES & BENEFITS  
 PROPERTIES  
 LOAD TABLES  
 CONTACT