




Since 1992

SL-15

Roofing & Siding Panel


GENERAL

- Architectural standing seam panel
- Vertical, narrow ribs provide an elegant and classic appearance

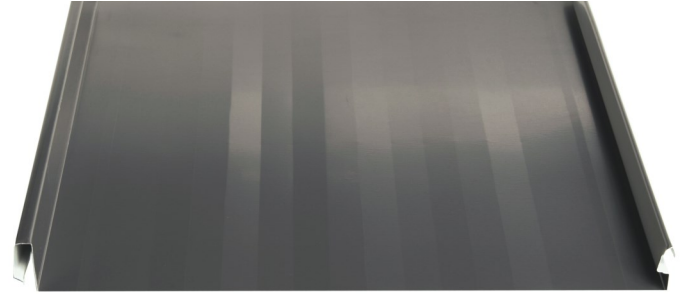

FEATURES & BENEFITS

- Striated pan minimizes oil-canning
- Snap lock rib—No mechanical seaming
- On-site roll forming available
- Made from high-tensile steel for superior load capacity*
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- *Tough Bond 3000™* SMP paint system with a 40 year written paint warranty

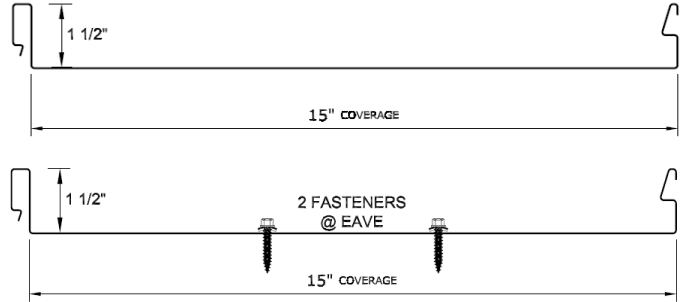

PROPERTIES

- Coverage: 15 inches
- Major Rib Height: 1.5"
- Major Rib Spacing: 15" o.c.
- Major Rib Configuration: Vertical, Snap Lock
- Fastening: Concealed clip
- Thickness: 26 GA, 24 GA **
- Minimum Roof Slope: 2:12
- Base Metal: 80 ksi steel
- Options: Pencil Rib or Flat Pan***



LOAD TABLES

26 GA SL-15 Allowable Gravity Loads (psf)							
Span	2'	2.5'	3'	3.5'	4'	4.5'	5'
Simple Span	114.3	91.5	76.2	65.3	57.2	49.4	39.0
Two-Span	134.6	107.7	77.7	57.6	44.3	35.1	28.5
Multi-Span	142.9	114.3	89.9	66.8	51.4	40.8	33.1

SL-15 does not provide diaphragm strength or structural brace points. Installation recommended over solid sheeting.

*Contact RSP for complete load tables.

**Limited colors in 24 GA, contact RSP for availability.

***Oil canning may occur and is not reason for rejection.

CONTACT

1010 North Nelson St. Spokane, WA 99202

Phone: (509) 535-8667 Toll Free: (800) 238-4057

WWW.GO-RSP.COM or WWW.RSPSS.COM

ROLLED STEEL PRODUCTS, INC.