



Since 1992

SW-16

Soffit & Wall Panel


GENERAL

- Concealed fastener soffit & wall panel
- Flush panels give a uniform, smooth and sleek appearance



FEATURES & BENEFITS

- Center pencil rib
- Vented option for soffit application
- No visible fasteners
- On-site roll forming available
- Made from high-tensile steel for superior load capacity*
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- *Tough Bond 3000™* SMP paint system with a 40 year written paint warranty

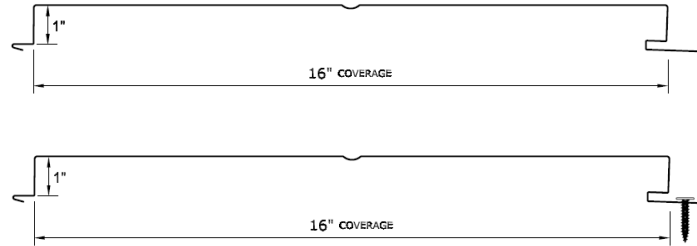

PROPERTIES

- Coverage: 16 inches
- Major Rib Height: 1"
- Major Rib Spacing: 16" o.c.
- Major Rib Configuration: Concealed, Interlocking
- Fastening: Concealed, screws or nails
- Thickness: 26 GA, 24 GA **
- Base Metal: 80 ksi steel
- Options: Vented (5.1 sq in/sf), Non-Vented, Striated or Flat Pan***



LOAD TABLES

26 GA SW-16 Allowable Gravity Loads (psf)							
Span	2'	2.5'	3'	3.5'	4'	4.5'	5'
Simple Span	120.2	94.2	64.5	45.4	31.2	21.9	16.0
Two-Span	106.5	69.1	48.4	35.7	27.5	21.7	17.6
Multi-Span	122.8	80.1	56.2	41.5	31.9	25.3	20.5

*Contact RSP for complete load tables.

**Limited colors in 24 GA, contact RSP for availability.

***Oil canning may occur and is not reason for rejection.

CONTACT

1010 North Nelson St. Spokane, WA 99202 Phone: (509) 535-8667 Toll Free: (800) 238-4057
 WWW.GO-RSP.COM or WWW.RSPSS.COM

ROLLED STEEL PRODUCTS, INC.