

KEY FEATURES

- Choose from Acrylic Coated Zincolume or Galvanized
- Available in a wide variety of ArmorTech™ colors
- Applies over solid sheeting or open framing
- 29 or 26 gauge standard
- Minimum roof slope 1:12
 - Special detail at ridge, eave & side-lap
- Coverage: 29-5/16" (roof), 32" (wall)
- Major Rib Height: 7/8"
- Major Rib Spacing: 2-2/3" OC.
- Major Rib Configuration: Corrugated
- Fastening: Direct fastened
- Thickness: 29ga, 26ga, 24ga (A606)
- Base Metal: 80 ksi steel
- Installation recommended over solid sheeting

Allowable Load L/180	Span in Feet					
	2.5'	3'	3.5'	4'	4.5'	5'
Load Values are in psf						
29GA - 1 Span	96	60	38	25	17	13
29GA - 2 Span	95	66	48	37	29	23
29 GA - 3 or more Spans	112	77	57	43	34	26
<hr/>						
26GA - 1 Span	140	80	50	33	23	17
26GA - 2 Span	145	100	74	56	44	36
26GA - 3 or more Spans	169	117	86	65	48	35




MATERIAL SPECIFICATIONS

- 29 & 26 gauge ArmorTech™ SMP Painted Steel G-90 Galvanized or AZ-50
- 29, 26 & 24 gauge bare Zincolume® Plus AZ-55 (No finish warranty – 25 yr. perforation warranty)
- 29, 26 & 24 gauge bare G-90 Galvanized (No finish warranty – no perforation warranty)
- 24 & 22 gauge Kynar 500® Painted Steel (inquire)

FINISHES

- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

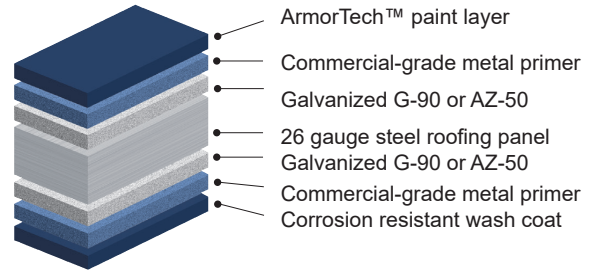

40-Year Residential Manufacturer’s Limited Warranty

STANDARD COOL ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 07-24