



Through Fastener Flashing Guide



Standard ArmorTech™ Coatings



Obsidian Black SRI-NA (Formerly: Black)

ArmorTech™ Panel Coating Availability Chart

(x) Color Available (*) Please Inquire. Additional charges may apply.


Panels	Gauge	Polar White	Glacier White	Stone White	Ivory	Light Stone	Sandstone	Hickory	Sand Gold	Ash Grey	Sterling Grey	Charcoal Grey	Tile Red	Tahoe Blue	Pacific Blue	Sage Green	Forest Green	Pine Green	Desert Brown	Cocoa Brown	Kodiak Brown	Weathered Cop	Obsidian Black	Copper Penny	Zincalume® Plu	G-90 Galvanize	Rusteel Plus®
Rolled Rib	29	Х	*	Х	Х	Х	Х	Х		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	
Classic 7/8" Corrugated™	29	Х	*	Х	Х	Х	Х	Х		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	*	*	
PBR, IC34, Classic 7/8" Corrugated	26	Х	*	*	*	*	Х	Х	*	Х	Х	Х	Х	*	Х	*	Х	Х	Х	Х	Х	Х	Х	Х	Х	*	
Other products available through Taylor Metal Products (inquire for lead times):												^															
T-3™, GR-7™	29	Х	Х	Х	Х	Х	Х	Х		Х	Х	Х	Х	Х	Х	Х	Χ	Х	Х	Х	Х	Х	Х	Х	Х	Х	
T-3™, GR-7™, Max Corr™, PBR, HR-34	26		Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	Х	*	Х	Х	Х	Х	Х	Х	Х	
PBR, HR34™	29		Х																								
PBR, HR34™, Max Corr™	24				*5	See K	ynar	500®	PVD	F col	or cha	art													Х	*	
PBR, HR34™, Max Corr™	22				*5	See K	ynar	500®	PVD	F col	or cha	art										П			*	*	Х
PBR, HR34™, Max Corr™	Alum				*5	See K	ynar	500®	PVD	F col	or cha	art															
Classic 7/8" Corrugated™	24				*5	See K	ynar	500®	PVD	F col	or cha	art													Х	*	
Classic 7/8" Corrugated™	22				*See Kynar 500® PVDF color chart													*	*	Х							
Classic 7/8" Corrugated™	Alum			*See Kynar 500® PVDF color chart																							
Hi-Rib, 2-1/2" Corrugated™	29		Х																						Х	Х	

^{**} Disclaimer: Zincalume® Plus / Galvalume® AZ-55 is a 55% aluminum, 45% zinc metallic coating over steel and has no finish warranty - 25 year perforation warranty provided

SRI=Solar Reflective Index, these are not paint codes.
Oil canning is not a cause for material rejection.
These printed chips provide a close representation of the colors.
Metal samples are available upon request.
Non-visable / sub-flashings are not provided in specific colors unless specified

Hi-Rib, 2-1/2" Corrugated™





Other Taylor Metal companies:


 $X \mid X$




Χ

Χ


2-1/2" Corrugated / Max Corr™

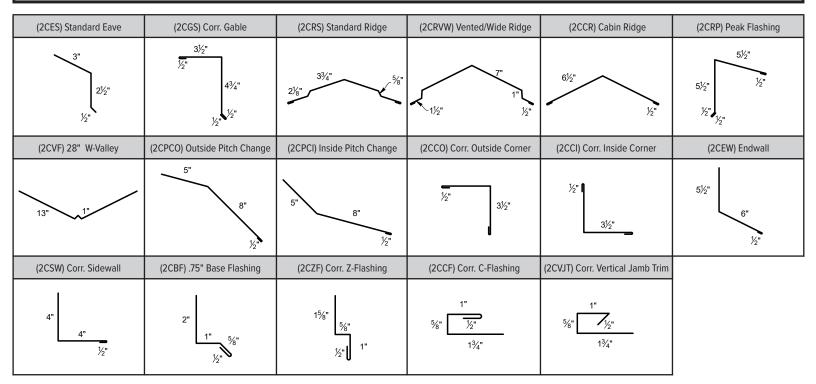

Panels shown in this brochure

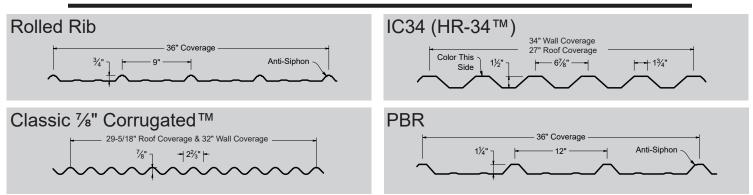

Other popular panels offered through Taylor Metal Products

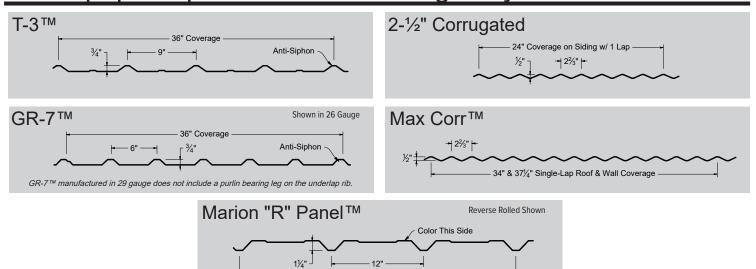

For panel options and additional information, visit www.go-rsp.com or call 503-535-8667

36" Coverage


Rolled Rib

(T3CET) .75 - Eave Trim	(T3CETG) .75 - Gutter Eave Trim	(T3ES) Standard Eave	(T3E4) 4" Eave	(T3SE6) .75 - 2x6 Step Eave	(T3CGL) .75 - Gable Trim - Large
5½" 6" ½"	4" ½" 1"	3" 2½" ½"	41/4"	5%" 2½"" 3½" ½" ½"	1" 6½" 1" 6½"
(T3CMG) .75 - Gable Trim - Mini	(T3GS) .75 - Standard Gable	(T3SG6) .75 - 2x6 Step Gable	(T3SG8) .75 - 2x8 Step Gable	(T3RS) Standard Ridge	(T3RVW) Vented/Wide Ridge
1/2" 2" 4" 1/2"	1" 4½" 5%" 5" 5%"	1" 4" 3½" 3½" ½" ½"	1" 4" 4¼" 4¼" 4¼" ½"	2½" 5%"	7" 1"
(T3CR) Cabin Ridge	(T3UR) Universal Ridge	(T3RP) Peak Flashing	(T3VF) 28" W-Valley	(T3PCO) Outside Pitch Change	(T3PCI) Inside Pitch Change
6½"	1½" 4¼" 5½"	5½" ½" ½"	13" 1"	5" 8" ½"	5" 8" ½"
(T3CO) .75 - Outside Corner	(T3CI) .75 - Inside Corner	(T3DE) Door Edge	(T3EW) Endwall	(T3SW) .75 - Sidewall	(T3BF) .75 - Base Flashing
5%" 4½"	5%" 1" 4½"	25%"	5½"	4" 4½" 1" 5½"	2" 1" 5½"
(T3ZF) .75 - Z-Flashing	(T3MC) Mini Corner	(T3CF) .75 - C-Flashing	(T3VJT) .75 - Vertical Jamb Trim	(T3CR1S) 1.5" x 5.5" Special Rake	(T3CR7S) 1.5" x 7" Special Rake
15%" 1" ½" 1"	2"	2 ³ / ₈ " 1" 1" 1"	2 ³ / ₈ " 1" 1" 1"	1½" 2½" ½" 2½"	3½" ½" 3½"
(T3RLTH) Hemmed LT Ridge Cap	(T3PAN) Pan Flashing	(T3RP4) 4" Peak Cap	(T3SR) Soffit Ridge	(T3PF) Prow	(T3MMG) Modified Mini Gable
6" 1½" ½" 1½"	16.75" S.O.	4" 3%" 3%" 3%"	1½" 4"	3½" 11½" ½" 3½" 3½" ½" 5%"	3½" 13½" 3½" 3½" 5½"
(T3APCI) .75 Alt. Inside Pitch	(T3STG) .75 Style G	(T3SSTG) .75 Special Style G	(T3E33) .75 3"x3" Drip	(T3SCF) .75 Soffit C-Flashing	(T3FT5) .75 Fascia Trim
6" 4" 1½" ½" ½"	13%"	2½"	3" 3" 5%"	1"	SPECIFY FACE
(T3FT7) .75 Fascia Trim 7-5/8"	(T3FT9) .75 Fascia Trim 9-5/8"	(T3AEW) .75 Alt. Endwall	(T3GRS) .75 Gravel Stop	(T3RSB) .75 RSP Snow Break	
29/16" SPECIFY FACE	2 ¹ / ₈ " SPECIFY FACE 1/2"	4" 3" 1½" ½"	2"	1½" 2" 1½" 1½" ½" ½"	

Door Accessories

(T3DJ5) Door Jamb 4-5/8" - 7-1/2"	(T3DJ7) Door Jamb 7-5/8" - 9-1/2"	(T3DJ9) Door Jamb 9-5/8" - 11-1/2"	(T3OJ5) Open Jamb 4-5/8" - 7-1/2"	(T3OJ7) Open Jamb 7-5/8" - 9-1/2"	(T3OJ9) Open Jamb 9-5/8" - 11-1/2"
4 ⁵ ½" TO 7½" 1" 1½"	75%" TO 9½" 1" 1½"	9 ⁵ / ₈ " TO 11 ⁵ / ₈ " 1" 1½"	1½" 4½" TO 7½"	1½" 7%" TO 9½"	9%" TO 11%"
(T3TCS)Single Track-Facemount	(T3TCSCB) Single Track-Studmount	(T3TCDCB) Double Track-Studmount	(T3DO) Door Opening	(T3DRC) Door Rail Cover	(PBRDRC) Door Rail Cover
1½" 4½" 4½" ½" 1½"	13/4" 91/4" 17/8"	1 ³ / ₄ " 6 ¹ / ₂ " 6 ¹ / ₂ " 1 _{7/6} "	5½" 1" 5½"	3"	3"
(T3ATCS) Alt. Single Door Track Cover	(T3ATCD) Alt. Double Door Track Cover				

PBR

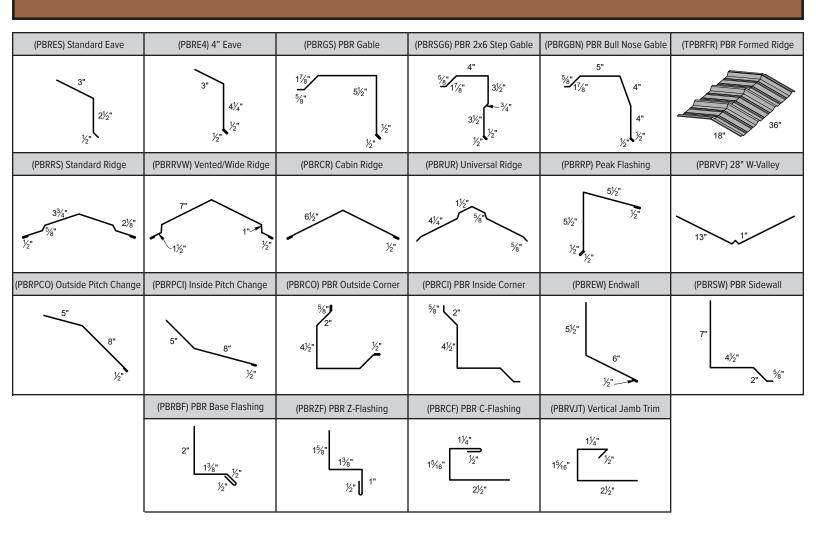

IC34 (HR-34™)

(HRES) HR-34 Eave	(HRGS) HR-34 Gable	(HRGSB) HR-34 Gable B	(HRRS) Standard Ridge	(HRRVW) Vented/Wide Ridge	(HRCR) Cabin Ridge
4" 4" ½" ½"	3½" ½" 4¾" ½" ½"	1" ½" 4¾" 4¾" ½"	33/4" 21/8"	7" 1½" ½" ½"	6½"
(HRRP) HR-34 Peak Flashing	(HRVF) 28" W-Valley	(HRPCO) Outside Pitch Change	(HRPCI) Inside Pitch Change	(HRCO) HR-34 Outside Corner	(HRCI) HR-34 Inside Corner
5" 5½" ½" ½" ½"	1", 13"	5" 8" ½"	5" 8" ½"	1½" 4½" 72"	1½"
(HREW) HR-34 Endwall	(HRSW) HR-34 Sidewall	(HRBF) HR-34 Base Flashing	(HRZF) HR-34 Z-Flashing	(HRCF) HR-34 C-Flashing	(HRPS) HR-34 4" Perforated Strip
5½" 6"	4" 4½" 1½"	2" 15%" 12"	15%" 15%" 1" 1"	3" 1 ⁵ / ₈ "	4"

Classic %" Corrugated

