

KEY FEATURES

- Striated panel minimizes oil-canning
- Snap lock rib — No mechanical seaming
- On-site roll forming available
- Made from high-tensile steel for superior load capacity
- All painted materials have corrosion resistant metallic finish under the primer and topcoat
- ArmorTech™ SMP paint system with a 40 year written paint warranty
- Coverage: 15 inches
- Major Rib Height: 1.5"
- Major Rib Spacing: 15" o.c.
- Major Rib Configuration: Vertical, Snap Lock
- Fastening: Concealed clip
- Thickness: 26ga, 24 ga
- Base Metal: 80 ksi steel
- Options: Striated, Pencil Rib or Flat Pan

26 GA SL-15 Allowable Gravity Loads (psf)

Span	2'	2.5'	3'	3.5'	4'	4.5'	5'
Simple Span	114.3	91.5	76.2	65.3	57.2	49.4	39.0
Two-Span	134.6	107.7	77.7	57.6	44.3	35.1	28.5
Multi-Span	142.9	114.3	89.9	66.8	51.4	40.8	33.1




MATERIAL SPECIFICATIONS

- 26 gauge ArmorTech™ SMP Painted Steel
G-90 Galvanized or AZ-50
- 26 gauge bare Zincolume® Plus AZ-55
(No finish warranty – 25 yr. perforation warranty)
- 26 gauge bare G-90 Galvanized
(No finish warranty – no perforation warranty)
- 24 gauge Kynar 500® Painted Steel
(inquire)

FINISHES

- ArmorTech™ Paint System - excellent in exterior durability
- “Cool” color pigments are specially designed to reflect infrared light, reducing heat gain to dwelling, and conform with ENERGY STAR® criteria
- Superior quality, two coat SMP resin system at 1 mil. thickness
- 40-year residential paint warranty
 - fading
 - chalking
 - chipping
 - cracking
 - peeling

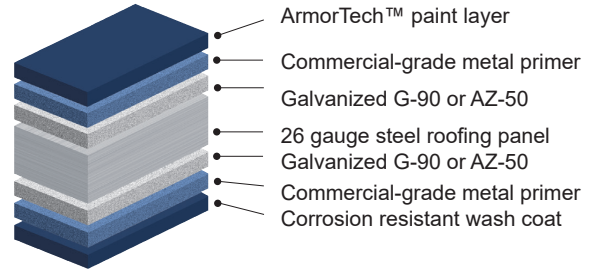

40-Year Residential Manufacturer's Limited Warranty

STANDARD COOL ARMORTECH™ SMP COLORS



These printed chips provide a close representation of the colors.

Metal samples are available upon request. Coatings are low gloss 10-15% sheen. SRI = Solar Reflective Index. SRI values listed above are in accordance with ASTM E1980 and are based on actual testing. ***Oil Canning is not a cause for material rejection***



Rev. Date 7-24